



REVIEW ARTICLE

Turmeric planting methods and mechanization strategies: A review towards the development of a fully automatic planter

Vishal S1, Kavitha R1*, Suthakar B1, Mohankumar AP1, Rajasree V2 & Sakthivel N3

- ¹Department of Farm Machinery and Power Engineering, Tamil Nadu Agricultural University, Coimbatore 641 003, India
- $^2 Department \ of \ Spices \ and \ Plantation \ Crops, \ Horticultural \ College \ \& \ Research \ Institute, \ Tamil \ Nadu \ Agricultural \ University, \ Coimbatore \ 641\ 003, \ India \ College \ Agricultural \ Colle$
- ³Agricultural Research Station (ARS), Tamil Nadu Agricultural University, Bhavanisagar 638 451, India

*Email: kavitha@tnau.ac.in



ARTICLE HISTORY

Received: 27 February 2025 Accepted: 25 March 2025 Available online Version 1.0: 14 July 2025



Additional information

Peer review: Publisher thanks Sectional Editor and the other anonymous reviewers for their contribution to the peer review of this work.

Reprints & permissions information is available at https://horizonepublishing.com/journals/index.php/PST/open_access_policy

Publisher's Note: Horizon e-Publishing Group remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Indexing: Plant Science Today, published by Horizon e-Publishing Group, is covered by Scopus, Web of Science, BIOSIS Previews, Clarivate Analytics, NAAS, UGC Care, etc See https://horizonepublishing.com/journals/index.php/PST/indexing_abstracting

Copyright: © The Author(s). This is an openaccess article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution and reproduction in any medium, provided the original author and source are credited (https://creativecommons.org/licenses/by/4.0/)

CITE THIS ARTICLE

Vishal S, Kavitha R, Suthakar B, Mohankumar AP, Rajasree V, Sakthivel N. Turmeric planting methods and mechanization strategies: A review towards the development of a fully automatic planter. Plant Science Today (Early Access). https://doi.org/10.14719/pst.7956

Abstract

Turmeric (Curcuma longa), a major crop in India accounting for 80 % of global production, faces challenges such as pest infestations, diseases, climate change and economic volatility, necessitating precision agriculture strategies to enhance sustainability. Planting is a critical determinant of crop yield and quality; however, conventional manual methods remain labor-intensive and inefficient, underscoring the need for mechanization. Mechanical turmeric planters have been shown to decrease the cost and time associated with planting by 59.52% and 96.57 %, respectively. This review examines key turmeric planting methods, including flat-bed, ridge-and-furrow and raisedbed systems, while analyzing the engineering properties of turmeric rhizomes relevant to planter design. It has been found that ridge planting has produced 86.78 q ha⁻¹ of yield compared to flat-bed planting of 67.26 q ha⁻¹ and raised bed planting significantly reduced disease incidence, with only 9.6 % leaf spot and no rhizome rot observed, compared to 22.5 % leaf spot using the flat bed method. The evolution of planting technology from manual to semi-automatic and fully automatic systems is discussed, along with a critical assessment of metering mechanisms such as vertical rotating discs, multistage rotating cups and auger conveyors. The influence of furrow opener design and operational parameters, including planting speed and accuracy, on field performance was also reviewed. By identifying research gaps related to the impact of rhizome properties on planter efficiency, this study concludes that optimized automatic planters tailored to turmeric's specific agronomic requirements can enhance planting precision, improve productivity and contribute to sustainable cultivation practices.

Keywords

automatic turmeric planter; engineering properties; metering mechanisms; raised-bed planting; single-bud transplantation

Introduction

Turmeric (*Curcuma longa*), which is widely recognized for its distinctive color and medicinal properties, has an extensive history of cultivation in India. Globally, turmeric is cultivated in various countries in Asia, Africa and America. However, India dominates both the production and export markets, contributing approximately 80 % of the global supply (1). India is the largest producer, consumer and exporter of turmeric, cultivating it on 324000 hectares and producing 1.161 million tons (2). Productivity has increased from 2224 kg ha⁻¹ in 2018-19 to 3349 kg ha⁻¹ in 2022-23 (3). The state-wise production of turmeric has been reported (4), as illustrated in Fig. 1.




Fig. 1 State-wise production of turmeric in India, (DASD, 2023).

Despite its prominence, the turmeric industry faces significant challenges that jeopardize its sustainability and profitability. Agricultural obstacles, such as susceptibility to diseases, such as leaf blotch and rhizome rot, along with pests, such as shoot borers (5), pose ongoing risks to crop health. Furthermore, climate change exacerbates these issues, leading to irregular rainfall patterns and temperature fluctuations that adversely affect crop yield (6). Economically, turmeric farmers often contend with volatile market prices and a lack of formalized markets, resulting in exploitation by intermediaries and reduced profitability, particularly for smallscale producers (7). Due to challenges, the area dedicated to turmeric cultivation in India is projected to decline in the coming years (4), as illustrated (Fig. 2). This trend underscores the urgent need for precision agriculture to address the evolving demand for turmeric farming.




Fig. 2 Trends in the sowing area of turmeric in India, (DASD, 2023).

The planting process is a critical component of successful turmeric cultivation and significantly influences the health, yield and quality of crops. The conventional method of planting turmeric is labor intensive, time-consuming and economically demanding. Among various costs involved in turmeric cultivation, seed and labour costs account for 34.22 % and 29.42 % of the total cost of cultivation (8). Due to improved industrial and urban livelihood opportunities, labour availability has decreased to a great extent in agriculture sector. The compound growth rate of agricultural labors from 1994-2018 reveals a shift from moderate positive growth (1994-2005) to a consistent decline (2005-2018) (9).

Hence, the key in reducing the cost of cultivation of turmeric is by reducing the dependence of human power which can be achieved by increased mechanization. Despite the lower number of man-days required for planting turmeric rhizomes compared to other turmeric cultivation activities (10), as illustrated in Fig. 3, mechanized planters would significantly reduce labor intensity and improve productivity as the cultivation area increases. This is because planting is more critical for determining yield than harvesting or weeding is.




Fig. 3 Labor requirements for turmeric cultivation (10).

Precision planting enhances crop yield through optimal seed placement, spacing optimization and efficient resource utilization. Techniques such as variable-rate applications and site-specific management have improved productivity and reduced the environmental impact of crops such as potatoes, cotton and rice (11, 12). Advanced systems also contribute to yield stabilization over time, increased nutrient efficiency and waste reduction (13, 14). Mechanical turmeric planters have been shown to decrease the cost and time associated with planting by 59.52 % and 96.57 %, respectively (15). Automatic planters provide precise control over seed depth and spacing, thereby facilitating uniform crop development. This uniformity is crucial for streamlining harvesting operations and ensuring high-quality turmeric production (16). Additionally, these machines are designed to handle seeds with minimal damage to rhizomes during planting, thus reducing plant stress and susceptibility to diseases, which in turn enhances the overall growth and yield (17). Although existing turmeric planters are available, they are not optimized for the specific conditions required for turmeric cultivation. This gap underscores the necessity of developing a specialized automatic turmeric planter that specifically addresses these unique requirements, thereby improving planting efficiency and productivity. In this review, an analysis was conducted of the planting methods and mechanization aspects of turmeric planting for the development of automatic turmeric planters.

Turmeric planting methods

Turmeric cultivation uses diverse planting methodologies that significantly influence plant growth, yield, pest incidence and disease management. Each method creates distinct environmental conditions surrounding the rhizomes, thereby affecting the growth patterns and susceptibility to diseases and pests. The various turmeric planting methods are illustrated in Fig. 4 and the recommended plant spacing is shown in Fig. 5.




Fig. 4 Turmeric planting methods.

Despite increased yields, the risk of pest and disease problems also increases with flat-bed planting (18). Enhanced drainage and soil aeration can be achieved through ridge-and-furrow practices, thereby improving rhizome health and yield. Ginger rhizome health and yield enhancement has demonstrated through improved drainage and aeration (17). In addition to increasing yield, ridge planting has demonstrated efficacy in terms of plant height, leaf number, leaf breadth and number of clumps per plant (19). Raised beds enhance growth parameters and yield compared with traditional flat planting when implemented with optimal plant density (16, 20). Furthermore, this method significantly reduced disease incidence, with only 9.6% leaf spot and no rhizome rot observed, compared to 22.5 % leaf spot and 30.8 % rhizome rot observed using the flat-bed method (21). A summary of the advantages and limitations of different planting methods is presented in Table 1.

Overview of established planting practices for turmeric

Turmeric exhibits diverse responses to varying planting methodologies, with each significantly affecting the plant yield, growth rate and disease susceptibility. Ongoing research efforts are aimed at optimizing these aspects and elucidating numerous effective strategies. For instance, studies have demonstrated that both planting time and plant density are critical factors influencing the severity of leaf blotch and overall yield. Specifically, denser and earlier planting has been shown to substantially reduce disease impacts while simultaneously enhancing yield (22). Furthermore, innovative advancements, such as the single-bud transplanting technique, have not only reduced production costs but have also expedited the growth phases of turmeric, facilitating earlier maturity and harvest (23). This method utilizes smaller disease-free seed rhizomes, indicating a shift towards more economically viable cultivation practices. Additionally, employing various land configurations and incorporating soil conditioners, such as bio-compost, has been found to significantly enhance growth and yield, particularly when utilizing raised bed configurations as opposed to conventional methods (24). Moreover, mother rhizomes produce greater yields than secondary rhizomes when combined with raised bed planting (25). Furthermore, mother rhizomes of size 45-50 g were determined to be optimal for maximum yield (26). The optimum planting density for turmeric is 166667-222222 plants per hectare (27) and for organic cultivation, it is approximately 33300-37000 plants per hectare (28).

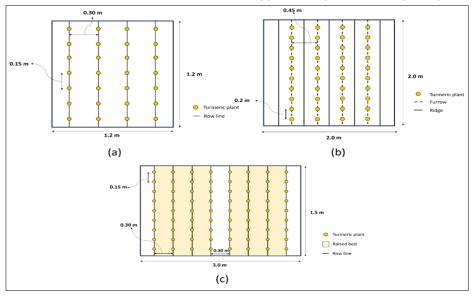


Fig. 5. Recommended spacings for (a) flat-bed planting, (b) ridge and furrow planting and (c) raised bed planting.

Table 1. Comparative analysis of different planting methods of turmeric

Aspect	Flat Bed Planting	Ridge Planting	Raised Bed Planting
Planting Method	Turmeric is planted on a levelled field without raised structures.	Turmeric is planted on ridges with furrows in between.	Turmeric is planted on wide, raised beds with furrows.
Plant spacing			
Efficiency (Yield & Growth)	Moderate yield; growth may be affected by poor drainage.	Higher yield due to better root aeration and drainage. A 26 % increase in yield was achieved compared with flatbed planting.	High yield; optimal root development and aeration. The yield was 17.14 % higher than flatbed method
Cost (Labor & Inputs)	Lower cost; minimal labor and materials required.	Moderate cost; requires additional labor for ridge formation.	Higher cost; requires more labor and input for bed preparation.
Soil Suitability	Suitable for well-drained loamy soils; not ideal for heavy clay.	Best for clayey and heavy soils where drainage is a concern.	Well-suited for sandy, loamy and even clayey soils.
Water Management	Poor drainage can cause waterlogging in high-rainfall areas.	Good drainage; excess water flows into furrows.	Excellent drainage; prevents water stagnation. It can save upto 16.5 to 36.8 % of water compared to flatbed planting.
Weed & Pest Control	Higher weed growth; pests may be more prevalent.	Moderate weed control; some pests may persist.	Lower weed and pest infestation due to structured layout.

Engineering properties of turmeric rhizome for development of a planter

The various engineering properties of turmeric, such as its physical, mechanical and frictional properties, are essential for developing the components of a turmeric planter, particularly in metering and seed delivery systems. The common engineering properties of the agricultural materials are shown in Fig. 6. The average length, breadth and thickness of turmeric rhizomes range from 30.38 to 50.60 mm, 9.77 to 10.64 mm, and 5.18 to 6.44 mm, respectively. The geometric mean diameter varied between 12.77 and 13.76 mm, sphericity between 0.27 and 0.42 and the aspect ratio from 0.20 to 0.35 (29). The average length, width and thickness of fresh turmeric rhizomes are 67.66 mm, 22.24 mm and 16.78 mm, respectively (30). When examining the geometric properties of turmeric rhizomes, the arithmetic mean diameter, square mean diameter and equivalent diameter increased as rhizome size increased. Conversely, sphericity and aspect ratio decrease with larger dimensions, indicating that larger rhizomes tend to exhibit a more elongated morphology (31). The bulk density is found to be348±6.30 kg m⁻³, the true density is found to be 1354±7.89 kg m⁻³ and the porosity is around 74.53±0.64 % (29). For the PTS 10 variety of turmeric, the average true density was 785.13 kg m^{-3} and the bulk density was 468.417 kg m^{-3} (32). Differences in bulk density were observed between mother rhizomes (570.38 kg m⁻³) and finger rhizomes (492.11 kg m⁻³), which also influence the design of equipment for the handling of turmeric. The coefficient of friction of turmeric rhizome varied with the surface material, 0.81±0.07 on an aluminum sheet, 0.94±0.05 on a mild steel sheet and 0.86±0.08 on a plywood sheet (33). The angle of repose of turmeric rhizomes is around 37.57±0.61° and 38.90°, indicating the behavior of rhizomes when accumulated (29). The coefficient of static friction on a mild steel was observed to be 0.81±0.04, with an angle of repose of 36.80°, which is an essential property for the design of conveyors and other handling equipment (34). The true density of turmeric rhizomes was 1002 kg m⁻³, with a bulk density of 0.512 kg m⁻³. The measured shear forces of 0.0408 kN for the mother rhizomes and 0.0159 kN for the finger rhizomes indicate that finger rhizomes are more susceptible to mechanical damage (35).

Evolution of turmeric planters

The evolution of turmeric planting technology has progressed from manual methods to fully automatic systems, as evidenced by various studies. This progression has addressed key challenges in turmeric cultivation, particularly in terms of

efficiency, labor requirements and yield optimization. Manual planting (Fig. 7), the traditional method, is labor-intensive and time-consuming. This often results in inconsistent plant spacing and reduced productivity (34, 36). These limitations prompted the development of more efficient planting methods. Animal drawn planters have been found to reduce drudgery while achieving a field capacity of 0.3 ha h-1 (37), which is significantly higher than manual planting. Semiautomatic planters (Fig. 8) have also been introduced to overcome the drawbacks of manual planting. Research has shown that these mechanized systems improve rhizome spacing and overall yield compared with manual methods (38). Further advancements in semi-automatic planters have focused on optimizing the metering mechanisms to ensure accurate seed placement. The latest development in turmeric planting technology is a fully automatic, tractor-drawn planter. Research have shown that the performance of a fully automatic tractor-drawn turmeric planter (Fig. 9) is effective in improving planting precision and reducing labor intensity (39). The comparative metrics of different levels of turmeric planting is presented in Table 2.



Fig. 7. Manual planting of turmeric rhizomes (34).




Fig. 8. Semi-automatic turmeric planter (38).

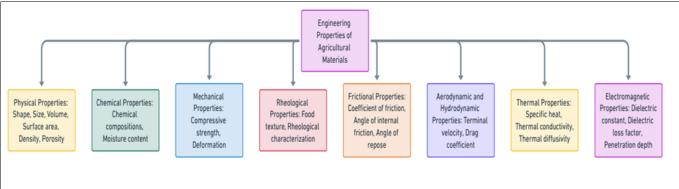


Fig. 6 Classification of engineering properties of agricultural materials.

Table 2. Comparative performance metrics of different methods of turmeric planting

Planting Method	No. of rows planted	Field Efficiency (%)	Labor Requirement (man-h ha ⁻¹)	Field Capacity (ha h ⁻¹)	Source
Animal-Drawn Planter	2	~65-75 %	80-100	~0.05-0.1	(37)
Semi-Automatic Planter	2	79.3 %	40-50 (depends on number of rows planted)	~0.12-0.15	(38)
Fully Automatic Planter	3	70.85 %	0	~0.19	(39)



Fig. 9. Fully automatic turmeric planter (39).

Metering mechanisms for automatic rhizome planting

Given that rhizomes such as ginger and root crops such as potatoes exhibit bulbaceous characteristics, they share common morphological features such as size and shape, with turmeric to a certain extent and could be utilized in the investigation of appropriate metering mechanisms for automatic turmeric rhizome planting. The metering mechanism in automatic planters ensures that manual labor is not required during the planting process, in contrast to manual and semi-automatic planters. Furthermore, the transition from semi-automatic to automatic planters was observed to reduce the overall labor cost by 60 % (40). Commonly employed metering mechanisms in automatic planters of rhizomes and root crops are categorized as follows:

- 1. Vertical rotating disc
- 2. Multistage rotating cup
- 3. Auger conveyor

A vertically rotating disc (Fig. 10) allows for velocity adjustments that significantly influence seed spacing, resulting in enhanced planting efficiency and crop yield. It is found to achieve a multiple index as low as 0.04 at a forward speed of 0.83 m s $^{-1}$ (41, 42). Additionally, a high emergence ratio of up to 98.9 %, uniform tuber spacing of approximately 88.5 %, and a reduced missing tuber ratio of 0.9 % were achieved with this



Fig. 11. Multistage rotating cup metering mechanism (44).

1. Seedling feeding wheel, 2. Seedling conveyer cum feeding wheel, 3. DC motor, 4. Gearbox, 5. Chain and sprocket power transmission system, 6. Delivery tube, 7. Shovel opener with disc closer attachment, 8. Slotted plate for feeding wheel, 9. Slotted plate for metering wheel, 10. DC speed controller, 11. Linear speed measurement setup, 12. Data acquisition system

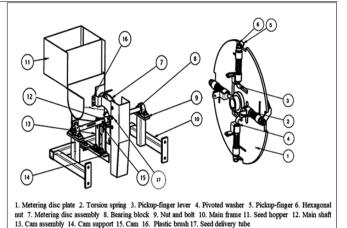


Fig. 10. Automatic ginger metering mechanism (41).

mechanism (43). The multistage rotating cup mechanism (Fig. 11) comprises multiple stages, wherein seedlings are extracted from a feeding wheel using a rotating cup and subsequently transferred to the planting site. The efficacy of these systems remains high across a range of operational velocities but may diminish as the velocity increases (44). As illustrated in Fig. 12, the auger-type metering device is appropriate for metering seedlings in nursery pots, including rhizome crops cultivated in controlled environments. This mechanism ensures high feeding and transplanting efficiencies up to a certain velocity, rendering it suitable for controlled and precise metering tasks (45). In addition to these three types, various other metering mechanisms have been developed by researchers for the automatic planting of rhizomes and root crops, as discussed in Table 3. Among the various metering mechanisms reviewed, a vertical rotating disc or multistage cup system may be the most promising, as these mechanisms have demonstrated favorable results with similar crops and can be optimized for the specific characteristics of turmeric. The picker wheel type can also be utilized if the occurrence of multiples is mitigated through the integration of an appropriate mechatronic system. However, additional empirical studies are required to determine the optimal mechanism.

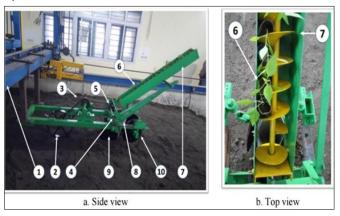


Fig. 12. The Auger-type metering device (45).

Implement trolley, 2. Ground wheel, 3. Power transmission system, 4. Main shaft, 5. Bevel gear holding assembly, 6. Seedling feed side of auger box, 7. Auger conveyer unit, 8. Delivery tube, 9. Furrow opener, 10. Furrow closer

Table 3. Study of performance of metering mechanisms for automatic planting of rhizome and other similar crops

S. No.		Effects on seed spacing uniformity	Author
	Picker wheel type		
1	The mechanism consists of several key components including a circular disc, picker fingers, a hopper, and a delivery pipe. The circular disc, integral to the mechanism's function, rotates to facilitate the sequential picking and placement of bulbs or corms into the soil. Picker fingers attached to the disc pick up the bulbs from the hopper and transport them to the delivery pipe, which guides them into the planting furrows.	s tested in a linear soil bin at varying forward (1.5 to 3.0 km/h) and nominal spacings (15, 20, cm). The metering unit performed best at the st speed of 1.5 km/h for both types of plants, ving the highest Quality of Feed Index (QFI) of 1.6 km. As the speed increased, the quality of feed and coefficient of uniformity, decreased, while hissing index and precision values increased, ting less accuracy and uniformity in planting. optimized metering device demonstrated a	(46)
2	The electric cup-chain potato metering device incorporates tilting seed cups with guard plates on an electrically driven chain to optimize seed placement. This setup is controlled by a differential GPS that adjusts the seeding speed in real time to the speed of the tractor. missing rat tradition of the speed of the properties of the tradition of the speed of the tractor. Add control	g-seeding rate of 4.39 % and a double-seeding seeding rate of 8.78 %, which are improvements over onal systems. These outcomes were achieved er specific operational conditions: a seeding sed of 0.32 m/s, a chain tightening distance of 94×10 ⁻³ m, and a cup tilting angle of 12.5°. litionally, the implementation of an electric system replaced the traditional ground wheeln chain, allowing for faster seeding and more accurate intra-row seed placement.	(47)
	Belt type		
3	The mechanism consists of a conveyor belt equipped with cups that are specifically sized to hold individual seed potatoes. As the belt transports the potatoes upwards, it turns over an upper sheave where the potatoes are then dropped onto the back of the next cup in line. This system ensures that each potato is metered and dropped at consistent intervals. At the bottom, the belt loops over a roller, creating an opening through which the potato drops into a furrow prepared in the soil.	sed speeds of the cup-belt led to more uniforming intervals, suggesting that faster belt speeds reduce the variability in potato placement. The initial hypotheses, more regularly shaped toes (spherical) did not significantly improventing accuracy. Instead, irregularly shaped oes achieved comparable or better accuracy. Ecommended that significant improvements in ing uniformity might be achieved by reducing pening time at the bottom of the duct and by	(48)
	revising	g the cup design and its positioning relative to the duct.	
	Cup type with torsion springs		
4	The mechanism consists of a vertical disc outfitted with cups, holding pins, and torsion springs, all attached at equal angles. Seeds are picked up from the hopper by the cups as the vertical disc rotates. The seeds are then secured by the holding pins until they are positioned over the furrow, at which point the pins are released by a pin-position cam, allowing the seeds to drop into the furrow.	or cups tended to produce more uniform seed ing compared to smaller ones. However, the est cup size used in the study also showed a repercentage of doubles, indicating a trade-off reen cup size and the risk of double planting. Ong seeds achieved better uniformity in seed spacing than spherical seeds. angular speeds resulted in more uniform seed g. As angular speed increased, the incidence of (gaps in planting) also increased, suggesting	(49)
	that	t slower speeds benefit the precision of the metering mechanism.	
	Pneumatic type		
5	The mechanism includes a seed box where micro-tubers are stored before they are individually picked up by suction tubes connected to a rotating seeding disc, which operates under negative pressure. As the disc rotates, micro, tubers are hold by the suction until they are	ne air-suction seeder achieved a high seed nent accuracy, with a qualified seeding index of over 90% under optimal conditions.	
	positioned above the seed trench, where they are then released into the ground. This release occurs when the suction holes align outside the	wer vibration frequencies and amplitudes contributed to higher seeding accuracy. eumatic design significantly reduced the risk of	(50)
	planting furrow.	seed damage and loss.	

Furrow openers

Furrow openers are critical components of the efficacy of mechanized planters. Their design significantly influences the soil penetration, soil disturbance, seed placement, germination rate, and operational efficiency. The selection of an appropriate furrow opener for specific soil conditions and planting requirements is crucial for optimizing crop yields and minimizing energy consumption in mechanized agriculture. Table 4 provides a concise overview of the various furrow openers.

Effect of various operational and machine parameters on performance of turmeric planters

An increase in the operational speed enhanced the performance of the turmeric planters. At velocities up to 12 km h⁻¹, the field capacity attained 0.96 ha h⁻¹, achieving optimal efficiency (58). However, elevated operational speeds increased the number of missed seeds. This observation suggests a decrease in seed placement accuracy with increased operational speeds,

indicative of a speed-accuracy trade-off (59, 38). The length of the turmeric rhizome does not significantly influence the field capacity of the planter (58). Further studies have explored the relationship between the machine parameters and planting outcomes. Research findings indicate that increasing the peripheral velocity of the seed metering disc from 0.17 to 0.23 m/ s led to an increase in rhizome spacing from 17.26 cm to 30.8 cm (60). The relationship between speed and spacing is not limited to rhizome planting. For instance, higher forward speeds enhance tuber deposition uniformity by accelerating the release process, whereas the irregularity of tuber shape has no significant impact on planting accuracy in a potato planter (48). These findings collectively highlight the complex relationship between operational speed and planting efficiency. However, despite these operational insights, there remains a notable gap in research on the effects of specific crop parameters such as rhizome size, weight and shape on the performance of turmeric planters. Although the length of the rhizome has been shown to

Table 4. Comparative performance of different furrow openers

Opener Type	Description	Performance Evaluation	Suitability for Planting Turmeric
Hoe-Type	Traditional tools designed to penetrate and disturb the soil, creating a furrow for seed or rhizome placement.	Effective in hard soils; higher draft force; higher soil moisture loss (51, 52).	Suitable for hard soils and provides good soil penetration, but may cause excessive soil moisture loss.
Disc-Type	Rotating discs that cut through the soil, creating a precise and narrow furrow with minimal disturbance.	Less soil disturbance; consistent seed placement; less draft force; poor penetration in hard soils (53, 54).	Not ideal for hard soils but suitable for well -tilled soils; minimal disturbance and accurate seed placement.
Shovel-Type	Characterized by a wide blade, opening a broader furrow compared to hoe-type openers.	Good soil penetration; higher draft forces better vertical and lateral separation; higher soil moisture loss (55, 56).	; Suitable for various soil types; good for turmeric rhizome placement due to wider furrow, but higher draft forces required.
Vibratory	Use mechanical vibrations to break up soil and create furrows, suitable for no-till or minimum tillage systems.	Efficient soil breakup; less power required; good seed placement; minimal soil disturbance (57).	Not ideal for turmeric as it is mainly suitable for no-till systems and may not provide the necessary soil depth and coverage for rhizomes.

have a minimal influence on field capacity, other crucial parameters may significantly affect planter efficiency and accuracy. The lack of comprehensive studies addressing these variables underscores a critical research gap and emphasizes the need for further investigation to guide the development of more efficient and crop-specific turmeric planters.

Recent advancements in planters

Recent advancements in planter includes mechatronic based control system for seed metering. As the control system is not based on the properties of planting material, it can be universally integrated with any planters irrespective of the size and shape of the crops. Traditional planters are driven by ground wheels and gearboxes, which can lead to poor seeding quality, especially at high speeds. GPS-based control system enhances precision, efficiency and cost-effectiveness in planting operations, particularly for large-scale, high-speed planting systems. GPS could be used as speed sensors with an advantage of neglecting slip in speed calculation. The integration of electric seed metering drive and GPS could be made for enhancing the seed spacing uniformity. Even at higher forward speeds of 10 to 12 km h⁻¹, a GPS based control system (Fig. 13) has achieved exceptional performance, with an average Quality Index (QI) of at least 92.84 %, a Miss Index (MI) not exceeding 5.80 % and a Precision Index (PI) surpassing 18.57 % (61).

In addition to tractor mounted automatic planters, a fully autonomous planting robot can further reduce the labor shortage and fuel consumption associated with tractor mounted planters. For an instance an autonomous seed planting robot (Fig. 14) was developed with a solenoid actuated seed metering mechanism and magnetometer-based

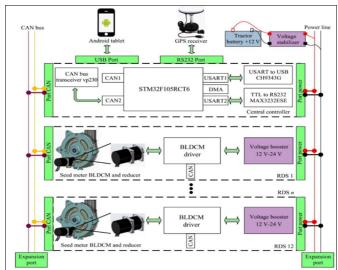


Fig. 13. GPS based Seed metering control system (61).




Fig. 14. Autonomous planting robot (62).

navigation system demonstrating the feasibility of going full autonomous in planting operation (62). But this technology has not reached the field level operation. As a result, there are no adequate field evaluation metrics to compare its performance with the existing technologies.

Although GPS has some navigational advantages, it adds to the initial cost of the machine more than other alternatives. For example, RADAR could achieve the same function with reduced complexities and minimal cost in comparison with GPS. Since it uses doppler effect for forward speed determination, the measured velocity is free from slip of the tractor wheel in case of tractor-mounted planters. Unlike GPS it does not rely on geographical co-ordinates for forward speed determination which reduces the complexity of the seed control system. For example, a RADAR based mechatronic seed control system (Fig. 15) developed was able to achieve an increase of 8.12-21.32 % in the quality of feed index across a speed range of 1.6-4.8 km h⁻¹ compared to the ground wheel driven mode (63).

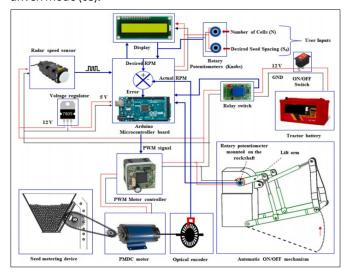


Fig. 15. RADAR based mechatronic seed metering control system (63).

Conclusion

The optimization of turmeric cultivation through innovative planting methods and mechanization presents significant opportunities for enhancing productivity and efficiency. The development of an automatic turmeric planter, informed by a review of various mechanical planters and automatic metering mechanisms, such as vertical rotating discs and pickers, promises to address key challenges such as labor intensity, inconsistent seed placement and susceptibility to diseases. The fresh turmeric rhizomes ranged in length from 30.38 to 50.60 mm, breadth from 9.77 to 10.64 mm and thickness from 5.18 to 6.44 mm. The geometric mean diameter of the rhizomes varied between 12.77 mm and 13.76 mm, sphericity ranged from 0.27 to 0.42 and the aspect ratio was between 0.20 and 0.35 (27). These measurements suggest that designing cups and buckets for a metering mechanism within these dimensional ranges would optimize the mechanized planting of turmeric. Turmeric rhizomes were found to have a low coefficient of friction with aluminum (31), suggesting the potential development of planter components designed for the flow of turmeric rhizomes in aluminum. Available turmeric planters are not exclusively tailored to the diverse and specific requirements of the optimal planting conditions. Given the proven influence of factors such as planting density, planting time, land configuration, and seed rhizome size on yield, growth and disease management, future planter designs must account for these parameters. To enhance productivity and efficiency, turmeric planters should incorporate flexibility in planting density, accommodate various rhizome sizes and support advanced techniques, such as single bud transplanting and raised bed configurations. To meet the demands of optimum turmeric planting configurations such as raised beds and triangular planting patterns, there is a need to develop a metering mechanism that can accommodate precise seed placement and spacing. Current planter designs fail to address the flexibility required for triangular planting, which offers optimal space utilization and airflow, thereby enhancing yield. A robust metering system should ensure the accurate positioning of seed rhizomes, maintain an ideal planting density and adapt to varying land configurations, such as raised beds, to fully optimize the potential benefits of these techniques. Shoveltype furrow openers were the most suitable for turmeric planting. In conclusion, mechanized planting strategies are essential for sustainable and profitable turmeric production, offering a path to increased efficiency, higher yields and greater economic viability for farmers.

Acknowledgements

Gratitude is extended to Tamil Nadu Agricultural University, Coimbatore, for their support in facilitating access to scholarly articles through their remote-access e-library program and for guiding in manuscript preparation. Special thanks are due to the Department of Farm Machinery and Power Engineering for their constructive feedback on the technical aspects of the review. Appreciation is also expressed to fellow researchers and colleagues for their critical insights, and to the editorial team for their valuable comments that improved the clarity and rigor of this work. Lastly, the author acknowledges the encouragement and support provided by family and friends throughout the research and writing process.

Authors' contributions

SV and RK carried out the collection of literature and drafted the manuscript. BS and APM carried out the revisions and discussions. VR and NS participated in the design of manuscript and final draft making. All authors read and approved the final manuscript.

Compliance with ethical standards

Conflict of interest: Authors do not have any conflict of interests to declare.

Ethical issues: None

References

- Jain S, Meena S, Kumar S, Amin PU. Overview of turmeric industry and market in India. J Spices Aromat Crops. 2021;30(1):1-10.
- Ministry of Commerce & Industry, Government of India. National Turmeric Board to increase awareness and consumption of turmeric and develop new markets internationally to increase exports. Press Inf Bureau. 2023.
- 3. Patare SD, Pokharkar VG, Shinde VA. Growth and instability in area, production and productivity of turmeric in Maharashtra. Pharma Innov J. 2023;12(8):2090–92.
- 4. Spices Board India. Major spice state-wise area production (2022-23). 2022.
- Sravani S, Prasad SV, Praveena PLRJ. Problems encountered by the turmeric farmers and suggestions to overcome the problems in marketing the produce in Kadapa district of Andhra Pradesh. Biol Forum Int J. 2023;15(5):225–29.
- Kumar P, Singh R, Lal SK. Impact of climate change on crop yield and role of model for achieving food security. Environ Monit Assess. 2019;191(8):476-86.
- 7. Raj D, Kumar M, Saha S. Market trends and economic issues for turmeric in the Indian context. Econ Aff. 2018;63(4):759-65.
- Viraja CV, Thumar VM, Tandel VB. Cost structure and profitability of turmeric cultivation in Navsari district of South Gujarat. International Journal of Chemical Studies. 2018;6(5):1486-88.
- Srivastava SK, Singh J, Kumar NR, Singh NP, Ahmad N. Changing agricultural labour market and its effects on farm economy in India. Indian J Agric Econ. 2020;75(4):469-80. https:// doi.org/10.22004/ag.econ.345141
- Zend JP, Revanwar MS, Gaikwad SS. Gender participation and technology use in turmeric production system. Curr Agric Res J. 2019;7(2):165-70. https://doi.org/10.12944/CARJ.7.2.04
- Cambouris A, Zebarth B, Ziadi N, Perron I. Precision agriculture in potato production. Potato Res. 2014;57:249-262. https://doi.org/10.1007/s11540-014-9266-0
- McKinion JM, Jenkins J, Akins D, Turner S, Willers J, Jallas E, Whisler FD. Analysis of a precision agriculture approach to cotton production. Comput Electron Agric. 2001;32:213-28. https://doi.org/10.1016/S0168-1699(01)00166-1
- Yost M, Kitchen N, Sudduth K, Sadler E, Drummond S, Volkmann MR. Long-term impact of a precision agriculture system on grain crop production. Precis Agric. 2017;18:823-42. https:// doi.org/10.1007/s11119-016-9490-5
- Zhao G, Miao Y, Wang H, Su M, Fan M, Zhang F, et al. A preliminary precision rice management system for increasing both grain yield and nitrogen use efficiency. Field Crops Res. 2013; 154:23-30. https://doi.org/10.1016/j.fcr.2013.07.019
- Muogbo C, Gbabo A, Nwakuba N. Field performance analysis of a tractor-drawn turmeric rhizome planter. Poljopr Teh. 2019; 44

- (3):33-46. https://doi.org/10.5937/PoljTeh1902033M
- 16. Leva RL, Thanki JD, Patel DD, Patel TU. Effect of different planting methods and levels of fertigation on turmeric (*Curcuma longa* L.). Bioinfolet Q J Life Sci. 2013;10:811-13.
- 17. Kumar M, Gill BS. Effect of method of planting and harvesting time on growth, yield and quality of turmeric (*Curcuma longa* L.). J Spices Aromat Crops. 2011;18:22–27.
- Gill BS, Kaur S, Saini SS. Influence of planting methods, spacing and farmyard manure on growth, yield and nutrient content of turmeric (*Curcuma longa* L.). J Spices Aromat Crops. 2004;13 (2):117-120.
- 19. Bhadouria RS, Singh TK, Singh J, Haldar A. Effect of various planting methods on growth and yield of turmeric (*Curcuma longa* L.). Plant Arch. 2013;13(2):1093-95.
- 20. Parkash O, Brar AS. Effect of planting methods and plant population on growth, yield and quality of turmeric (*Curcuma longa* L.). Indian J Ecol. 2015;42(2):490-92.
- 21. Rambabu E, Sunil Kumar M, Malathi S, Kishore Kumar N, Ramulamma A, Kranthi Kumar B. Front line demonstration of turmeric cultivation on raised bed with drip system in Telangana. Biol Forum-Int J. 2022;14(1):1483-86.
- 22. Prasadji JK, Rao DM, Murthy KK, Pandu S, Muralidharan K. Effect of cultural practices on leaf blotch severity and yield in turmeric. Indian J Plant Prot. 2002;30:115-19.
- Roshan RK, Pebam N, Kolom R, Sarawasat PK. Single bud transplanting technique of turmeric to reduce production cost. Int J Agric Sci. 2022;18:33–7. https://doi.org/10.15740/HAS/ IJAS/18-CIABASSD/33-37
- 24. Ardeshna RB, Arvadia MK, Patil RG, Savani NG. Effect of land configuration and soil conditioners on growth and yield of turmeric (*Curcuma longa*). Indian J Agron. 2013; 58(3):412-15. https://doi.org/10.59797/ija.v58i3.4209
- 25. Anitha B, Padma M, Natrajan S, Narayana DL, Sujatha M, Mahender. Evaluation of turmeric variety Selam with different types of planting material and sowing methods on growth and yield of turmeric. Pharma Innov J. 2021;10(7):1337-40.
- Padmadevi K, Jeeva Jothi L, Ponnuswami V, Durgavathi V, Rijwana Parveen I. Effect of different grades of rhizomes on growth and yield of turmeric (*Curcuma longa* L.). Asian J Hortic. 2012;7(2):465-67.
- Temteme S, Getachew E, Mekonnen B, Shimber T. Influence of type of planting material, plant density and method of planting on the yield and quality of turmeric (*Curcuma domestica* L.) at Tepi Southwestern Ethiopia. Adv Crop Sci Technol. 2017;5 (5):305. https://doi.org/10.4172/2329-8863.1000305
- Yang SK, Shin GH, Park SY, Kim HJ, Seo YW, Seo JB, et al. Effects
 of planting density on the growth and yield of organically
 turmeric cultivation in upland and paddy soil. Trends Agric Life
 Sci. 2016;53:12-21. https://doi.org/10.29335/tals.2016.53.1
- Balasubramanian S, Mohite AM, Singh KK, Zachariah TJ, Anand T. Physical properties of turmeric (*Curcuma longa L.*). J Spices Aromat Crops. 2012;21(2):178-81.
- 30. Thul PP, Shirsat BS, Sawant AA. Studies on engineering properties of fresh turmeric (*Curcuma longa* L.) rhizomes. Pharma Innov J. 2022;11(9):2587-90.
- 31. Parmar R, Dabhi MN. Physical properties of fresh turmeric rhizomes (Var. Salem). Int J Agric Environ Biotechnol. 2022;15 (Special Issue):369-77. doi.org/10.30954/0974-1712.03.2022.11
- 32. Farzana W, Niruba PP, Adeyemi AE. Physical properties of raw PTS 10 turmeric variety. J Pharmacogn Phytochem. 2017;1:782-86.
- Dhineshkumar V, Anandakumar S. Physical and engineering properties of turmeric rhizome. South Asian J Food Technol Environ. 2016;2(1):304-08. https://doi.org/10.46370/sajfte.2016.v02i01.03

- Venkat R, Reddy KVSR, Kumar AA, Babu RG, Rao CS. Investigation of physical properties of turmeric rhizomes about to design a metering mechanism for turmeric planting. Curr J Appl Sci Technol. 2023;42(43):45-52. https://doi.org/10.9734/ cjast/2023/v42i434277
- 35. de Ramos JD, Santiago MR, Barreto RP, Talaro NMG, Cullat JR. Determination of the physical and mechanical properties of turmeric (*Curcuma longa* L.). Philipp J Agric Biosyst Eng. 2021;17 (1):27-38. https://doi.org/10.48196/017.01.2021.03
- 36. Singh A, Kaur S. Evaluation of different methods of turmeric (*Curcuma longa* L.) plantation. Int J Agric Sci. 2015;11(1):201-03. https://doi.org/10.15740/HAS/IJAS/11.1/201-203
- 37. Kambale GV, Munde PA, and Solanki SN. Performance and evaluation of VNMKV, UAE developed bullock drawn turmeric planter. Pharma Innov J. 2023;12(1):131-36. https://doi.org/10.22271/tpi.2023.v12.i1b.18335
- Swamy R, Jayaprakash R, Sridhar M, Kumar SN, Naaiik RB. Performance evaluation of tractor drawn 2-row raised bed turmeric semi-automatic planter. Pharma Innov J. 2023;SP-12 (10):1783-86.
- 39. Mahesh BT. Sensor-based tractor drawn ginger planter. Farm Mach Power Eng. Doctoral [thesis]. Tavanur, India: Kerala Agriculture University; 2020.
- 40. Ahuja S, Bhatia B. Usage and field performance of automatic potato planters in India. Agric Eng Today. 2002;26:7-16.
- Pandey HS, Sawant CP. Design and development of a seed metering mechanism for ginger planter. J Sci Ind Res. 2023;82 (10):1071-80. https://doi.org/10.56042/jsir.v82i10.225
- 42. Liu HX, Guo LF, Fu LL, Tang SF. Study on multi-size seed-metering device for vertical plate soybean precision planter. Int J Agric Biol Eng. 2015;8(1):1-8.
- 43. El-Yamani AE. A new metering system for potato tubers planter. Egypt. J Agric Res. 2012; 90(2):777-95. https://doi.org/10.21608/ejar.2012.161202
- 44. Nandede BM, Raheman H. Multi-stage metering mechanism for transplanting of vegetable seedlings in paper pots. J Inst Eng India Ser A. 2015;96(4):295-300. https://doi.org/10.1007/s40030-015-0130-2
- Chilur R, Nandede BM, Tiwari PS. Development of an auger conveyor type metering device for transplanting of vegetable seedlings raised in paper pots. Trop Agric Res. 2018; 29(4):258-70. https://doi.org/10.4038/tar.v29i4.8253
- 46. Anandakumar TM, Singh TP, Chandrashekar. Development and laboratory evaluation of picker wheel type metering mechanism for tuberose and gladiolus corms. J Sci Ind Res. 2022;81:13-20. https://doi.org/10.56042/jsir.v81i01.55442
- 47. Kang N, Xianfa F, Yangchun L, Chengxu L, Yanwei Y. Design optimization and performance evaluation of an electric cup-chain potato metering device. Int J Agric Biol Eng. 2017;10(2):36-43.
- 48. Buitenwerf H, Hoogmoed WB, Lerink P, Müller J. Assessment of the behaviour of potatoes in a cup-belt planter. Biosyst Eng. 2006;95 (1):35-41. https://doi.org/10.1016/j.biosystemseng.2006.06.007
- Boydaş MG. Effect of cup size, seed characteristics and angular speed on the performance of an automatic potato planter under laboratory conditions. Tarim Bilim Derg. 2017; 23(3):317-27. https://doi.org/10.15832/ankutbd.447634
- Wang F, Sun K, Lai Q, Dong J, Su W, Yu Q. Design and test of single-row air-suction micro-tuber precision seeder. J Agric Mach. 2020;51(1):66-75. https://doi.org/10.1155/2020/7598164
- 51. Troger H, Reis AV, Machado A, Machado RLT. Analyzing the efforts in furrow openers used in low power planters. Eng Agricola. 2013;32(6):1133-43. https://doi.org/10.1590/S0100-69162012000600015
- 52. Darmora DP, Pandey KP. Evaluation of performance of furrow

openers of combined seed and fertiliser drills. Soil Tillage Res. 1995;34(2):127-39. https://doi.org/10.1016/0167-1987(94)00452-K

- Ahmad F, Weimin D, Qishou D, Rehim A, Jabran K. Comparative performance of various disc-type furrow openers in no-till paddy field conditions. Sustainability. 2017;9(7):1143. https://doi.org/10.3390/su9071143
- McLaughlin N, Campbell A, Owen G. Performance of hoe and triple disc furrow openers on no-till grain drills in a fine sandy loam soil. Soil Tillage Res. 2019;195:104373. https:// doi.org/10.1016/j.still.2019.104373
- Darmora DP, Pandey KP. Performance evaluation of shovel type furrow opener of a seed cum fertilizer drill in sandy soils. J Agric Eng. 2006;43(1):74-7. https://doi.org/10.52151/jae2006431.1163
- Kurhade A, Sharma A, Mathur R. Effect of tool parameters on performance of soil disruption by shoe type furrow openers for animal drawn seed drill in sandy loam soil. J Agric Eng. 2010;47:1-7. https://doi.org/10.52151/jae2010473.1412
- 57. Aikins KA, Barr JB, Ucgul M, Jensen TA, Antille DL, Desbiolles JMA. No-tillage furrow opener performance: A review of tool geometry, settings and interactions with soil and crop residue. Soil Res. 2020;58(7):603-21. https://doi.org/10.1071/SR19153

- 58. Gbabo A, Muogbo CP, Gana IM. Development of a tractor drawn turmeric planter. Asian J Agric Food Sci. 2020;8(4):92-7. https://doi.org/10.24203/ajafs.v8i4.6286
- Kumar M, Bariha A. Development of tractor operated semiautomatic two row turmeric planter. Pharma Innov J. 2023;12 (2):1057-60.
- 60. Vasuki G. Design and development of a tractor-operated turmeric planter. Farm Mach Power Eng. Master's [thesis]. Coimbatore, India: Tamil Nadu Agricultural University; 2012.
- Ding YQ, Yang L, Zhang DX, Cui T, Li YH, Zhong XJ. Novel low-cost control system for large high-speed corn precision planters. Int J Agric & Biol Eng. 2021;14(2):151–58. https://doi.org/10.25165/j.ijabe.20211402.6053
- Srinivasan N, Prabhu P, Smruthi SS, Sivaraman NV, Gladwin SJ, Rajavel R, et al. Design of an autonomous seed planting robot.
 In: Proceedings of the 2016 IEEE Region 10 Humanitarian Technology Conference (R10-HTC); 2016 Dec 21–23; Agra, India. Piscataway (NJ): IEEE; 2016. p. 1–4. https://doi.org/10.1109/R10-HTC.2016.7906789
- Pareek CM, Tewari VK, Nare B. A mechatronic seed metering control system for improving sowing uniformity of planters. J Eng Res. 2023. https://doi.org/10.1016/j.jer.2023.10.041